


TENUTA MECCANICA

TIPO MG12-G60

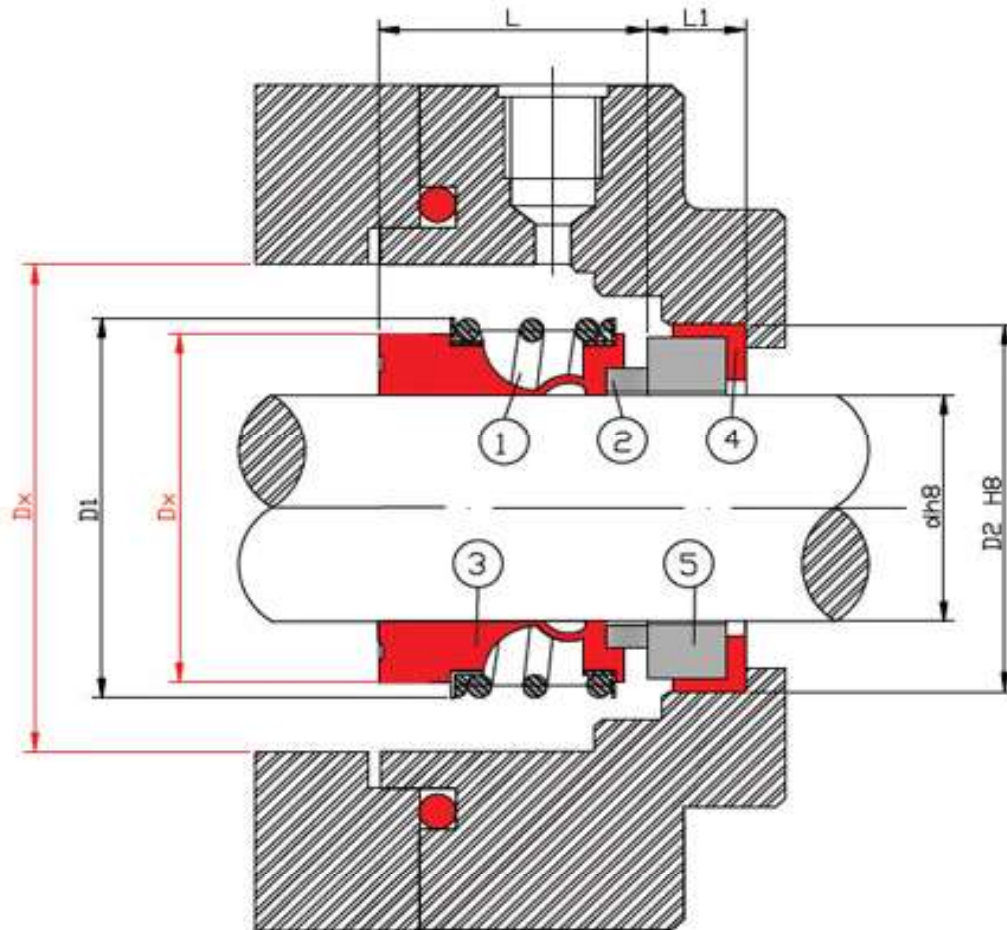

TENUTA MECCANICA

TIPO MG12-G60

(GRAFITE - ALLUMINA)



ANELLO TENUTA GRAFITE IMPREGNATA RESINA + EPDM					CONTROFACCIA ALLUMINA PURA AL 95% + EPDM				
CODICE	d mm	D1 mm	L mm	Ø ALBERO	CODICE	d mm	D2 mm	L1 mm	
0205112	12	25,0	25,9	12	0203712	13,0	23	6,6	
0205114	14	28,5	28,4	14	0203715	16,0	25	6,6	
0205116	16	28,5	28,4	16	0203716	16,5	27	6,6	
0205118	18	32,0	30,0	18	0203718	19,0	33	7,5	
0205120	20	37,0	30,0	20	0203720	23,0	35	7,5	
0205122	22	37,0	30,0	22	0203722	23,0	37	7,5	
0205124	24	42,5	32,5	24	0203724	26,0	39	7,5	
0205125	25	42,5	32,5	25	0203725	26,0	40	7,5	
0205128	28	49,0	35,0	28	0203728	31,0	43	7,5	
0205130	30	49,0	35,0	30	0203730	31,0	45	7,5	
0205132	32	53,5	35,0	32	0203732	34,0	48	7,5	
0205133	33	53,5	35,0	33	0203732	34,0	48	7,5	
0205135	35	57,0	35,0	35	0203735	37,0	50	7,5	
0205138	38	59,0	36,0	38	0203738	39,0	56	9,0	
0205140	40	62,0	36,0	40	0203740	42,0	58	9,0	
0205143	43	65,5	36,0	43	0203743	44,0	61	9,0	
0205145	45	68,0	36,0	45	0203745	47,0	63	9,0	

LIMITI OPERATIVI	COMPONENTI DELLA TENUTA MECCANICA	
p = 12 bar	FACCIA DI CONTATTO ROTANTE: GRAFITE IMPREGNATA RESINA	
v = 10 m/s	FACCIA DI CONTATTO FISSA: ALLUMINA PURA AL 95%	
t = -40°C +140°C	SOFFIETTO & OR: EPDM	MOLLA: ACCIAIO AISI 304

N.B.: la quota L si intende sempre in **posizione di lavoro**.