


TENUTA MECCANICA per Pompe JACUZZI®

**PNL**

(GRAFITE - ALLUMINA)

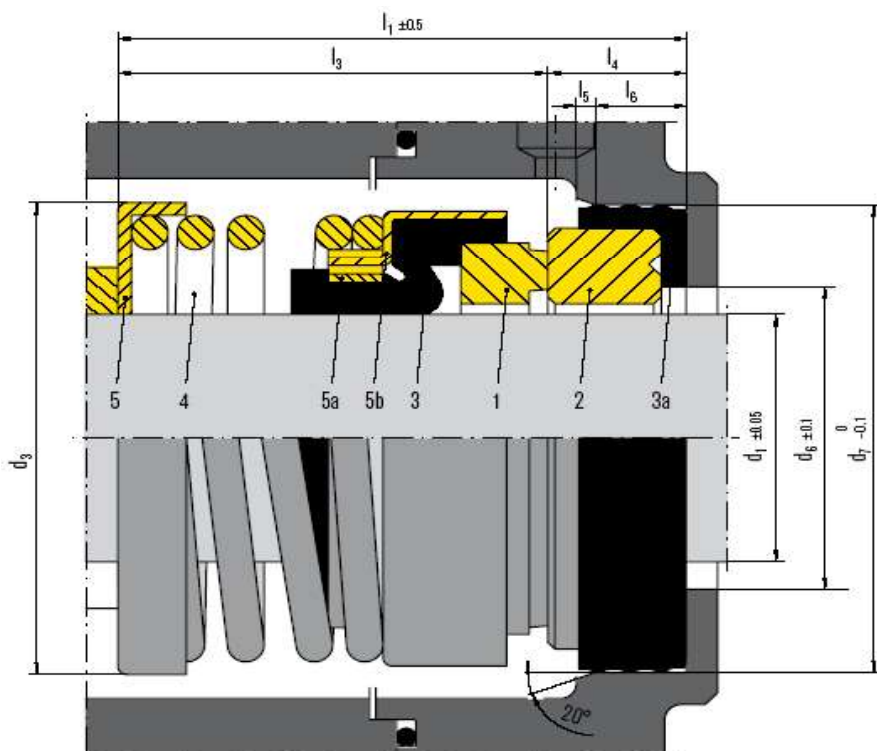

ANELLO TENUTA GRAFITE IMPREGNATA RESINA + NBR					CONTROFACCIA STEATITE (CERAMICA) + NBR				
CODICE	d1 mm	d3 mm	i3 mm	Ø ALBERO	CODICE	d1 mm	d7 mm	i4 mm	
0204612	12	22	15,5	12	0202512	14,0	26,0	5,5	
0204613	13	28	18,0	13	0202513	14,0	26,0	8,0	
0204614	14	28	18,0	14	0202515	16,5	29,5	8,0	
0204615	15	28	18,0	15	0202515	16,5	29,5	8,0	
0204616	16	28	18,0	16	0202515	16,5	29,5	8,0	
0204618	18	32	22,0	18	0202520	20,0	35,0	10,0	
0204219	19,05	32	22,0	19,05	0202520	20,0	35,0	10,0	
0204622	22	39	25,0	22	0202524	25,5	42,0	7,0	
0204226	25,40	42	27,0	25,40	0202527	27,0	41,5	11,0	
0204630	30	52	28,0	30	0202532	32,0	52,0	12,0	
0204231	31,75	52	49,0	31,75	0202531	33,0	47,6	11,0	

LIMITI OPERATIVI	COMPONENTI DELLA TENUTA MECCANICA	
p = 12 bar	FACCIA DI CONTATTO ROTANTE: <b>GRAFITE IMPREGNATA RESINA</b>	
v = 10 m/s	FACCIA DI CONTATTO FISSA: <b>STEATITE (CERAMICA)</b>	
t = -20°C +90°C	SOFFIETTO & OR: <b>GOMMA NBR</b>	MOLLA: <b>ACCIAIO AISI304</b>

**N.B.:** la quota i3 si intende sempre in **posizione di lavoro**.